

产品规格书

PRODUCT SPECIFICATION

客户名称:

CUSTOMER:

产品名称:

PRODUCT NAME:

保险丝 FUSE

型号:

MODEL:

$\Phi 5.2 \times 20$ 5J

规格:

SPECIFICATION:

F1.6AL 250V 快断型(FAST-ACTING)

料号:

PART NO.:

5J1160AP

供应商:

SUPPLIER:

地址:

ADDRESS:

编制 PREPARED BY	审核 CHECKED BY	批准 APPROVED BY

承认 SIGNATURE	审核 CHECKED BY	批准 APPROVED BY

供方签章:

SUPPLIER:

需方签章:

CUSTOMER:

日期:

DATE: 2013.12.30

日期:

DATE:

	PRODUCT	EDITION NO.	A/5
	SPECIFICATION	FILE NO.	LS/C- 005-17
	MODEL: 5J	PAGE	PAGE 1 OF 4

1. 适用范围 Scope of application

本产品适用于各种电子电器内的电路中起过电流保护作用。

This product is suitable for various kinds of electronic machines to work for over current protection.


2. 相关标准及认证 Relevant Standards and Certification

2.1 执行标准 Standards: IEC60127-1 IEC60127-2 GB9364.1 GB9364.2

2.2 认证 Certification

安规 Certification	认证范围 Scope of Certification	证书编号 Certification No.
UL	125mA~6.3A	E221465
CCC	200mA~6.3A	2004010207109470
CQC	8A~10A	CQC09012038370
VDE	200mA~10A	40009306
PSE	1A~5A	JET5359-31003-2001
	6.3A~15A	JET5359-31003-2002
KTL	200mA~800mA	SU05026-7002A
	1A~2.5A	SU05026-7003A
	3.15A~6.3A	SU05026-7001A

3. 结构及尺寸 Structure and Size (unit: mm)

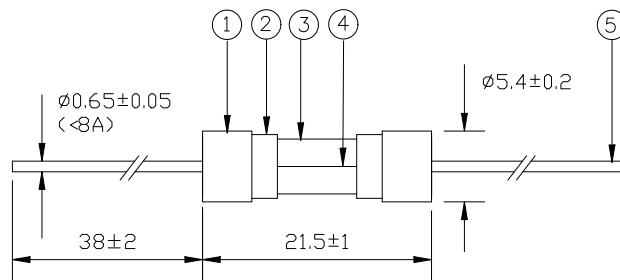

4. 原材料明细 Material Details

编号 No.	零件名称 Part Name	材质 Material
①	端帽 End cap	黄铜表面镀镍 Nickel plated brass
②	内帽 Inner cap	黄铜表面镀镍 Nickel plated brass
③	玻璃管 Glass tube	玻璃 Glass
④	熔丝 Fuse element	合金线 Alloy
⑤	引线 Lead wire	镀锡铜线 Tinned copper wire

	PRODUCT	EDITION NO.	A/5
	SPECIFICATION	FILE NO.	LS/C- 005-17
	MODEL: 5J	PAGE	PAGE 2 OF 4

5. 标示 Marking

保险丝两端铜帽上应印有下列标示： The fuse shall have the following marking :

A 帽： 型号+快断型符号+额定电流+低分断符号+额定电压

A Cap: Lanson's model+Electrical characteristics +Ampere rating + Low-breaking Capacity Symbol +Voltage rating

5J F 1.6A L 250V

B 帽： 标志+认证符号

B Cap: Lanson's logo + Approved Symbol



6. 外观 Appearance

6.1 外观不应有显著的污点、裂纹。

There shall not be any remarkable stain, rust or crack on the appearances.

6.2 标示应该很容易辨识。

Marking shall be easily legible.

7. 机械特性 Mechanical characteristics

拉力强度试验 Tensile test

将保险丝固定好后，对保险丝两端引线施加 5N 的轴向拉力，持续 1 分钟。试验过后，保险丝没有任何破损现象。

Exert the axial pulling force of 5N to the both ends of lead wire for 1 minute. After the test the fuse shall be no damage and loosening.

8. 电气特性 Electrical characteristics

8.1 实验条件 Test condition

所有测试环境温度为 25±5℃。

All electrical characteristics tests are conducted at an ambient temperature of 25±5℃.

8.2 分断能力 Interrupting rating test

保险丝能承受的分断能力：35A 或 10 倍的额定电流当中较大的。分断能力测试后测得保险丝的绝缘阻抗值大于 0.1MΩ。

	PRODUCT	EDITION NO.	A/5
	SPECIFICATION	FILE NO.	LS/C- 005-17
	MODEL: 5J	PAGE	PAGE 3 OF 4

The fuse interrupting capacity: 35A or 10 times the rated current whichever is greater. After interrupting, the insulation resistance between the fuse terminations shall be not less than 0.1MΩ.

8.3 时间-电流特性 Time-Current Characteristics

额定电流的% % of ampere rating	熔断时间 Opening time (200mA~6.3A)	熔断时间 Opening time (8A~10A)
210%	30 min Max	30 min Max
275%	50 ms~2 s	50 ms~2 s
400%	10 ms~300 ms	10 ms~400 ms
1000%	20 ms Max	40 ms Max

8.4 耐久性测试 Endurance test

对保险丝通过相关标准规格单规定的 1.2 倍额定电流 1 小时,然后截断电流 15 分钟,将该循环重复 100 次。试验过后保险丝没有任何破损现象。

A 1.2 times the ampere rating specified in the relevant standard sheet is passed through the fuse for a period of 1h. The current is then switched off for a period of 15 minutes. This cycle is repeated 100 times. After the test the fuse shall be no damage and loosening.

8.5 焊接参数 Soldering parameters

8.5.1 波峰焊 260℃,最大10秒,

Wave soldering 260 °C, 10 sec. Maximum

8.5.2 手工焊 350℃,最大5秒,

Manual soldering 350 °C, 5 sec. Maximum

8.6 时间电流曲线图见附页 Time- current curve see attachment

9. 环境特性 Environmental characteristics

9.1 使用温度范围 Operating Temperature

-55℃~125℃。

9.2 保存条件 Storage Conditions

相对湿度≦75%，可存放3年。

Relative humidity ≦ 75%, store 3 years .

10. 包装 Packing

10.1 200PCS/小袋、4小袋/内盒、10内盒/外箱(实际装箱依客户订单)。

200 fuses per plastic bag, 4 plastic bags per inner box, 10 inner boxes per external carton.

(The actual case in accordance with the customer order)

10.2 产品符合 RoHS 环保指令，环保标签如下，

The product is compliant with RoHS Directive, RoHS Label as follows,



	PRODUCT	EDITION NO.	A/5
	SPECIFICATION	FILE NO.	LS/C- 005-17
	MODEL: 5J	PAGE	PAGE 4 OF 4

附：承认书后附安规证书及环保报告

Appendix: The specification attached safety certificate and RoHS directive test report.

附页 attachment

Time-Current Characteristics 电流-时间曲线图

